

Specifications

Pressure Rating = 100 MPa / 14,503psi

Temperature Rating = 205°C / 400°F

Depending on explosives type, specify well temperature anticipated when ordering.

Designed for Initiation by electric line.


Required explosive components per assembly (not included):

- 1 each DW 2316512 Detonator DW0026 S
- 1 each DW 2315475 SH. Charge 61G BH HMX*
- 2 each DW 2505675 HMX Booster
- 50 Cm DW 2315352 Detonating Cord T 190 or alternatively PT 165 / PT 170 / PT 185

** Minimum 2 each needed to be ordered to obtain 1.4 S transport classification. Refer to specific data sheet for explosives components.*

Recommendation

Refer to appropriate instruction manual when assembling. Drift run with same OD configuration as given after use.

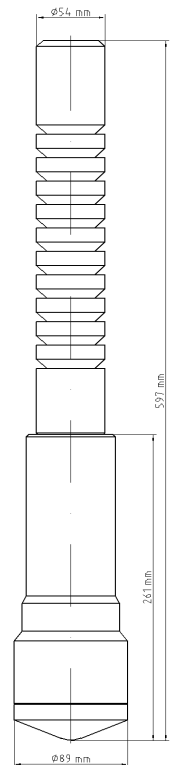

All Dimensions in mm

Selection Chart

Part No.	Size (mm / In)	Max O.D. after use (mm / In)	Top Connection	Weight each without Explosive Comp. (kg)	Gross Weight Per Box (kg)	Net Weight Per Box (kg)	Dimensions of Box (cm)
231708 4	89 / 3.500	92 / 3.622	1 3/16" 12 UN-2A Box (Go Teardrop)	4.05	6.0	2.0	44 x 30 x 31