





Configuration Schematic

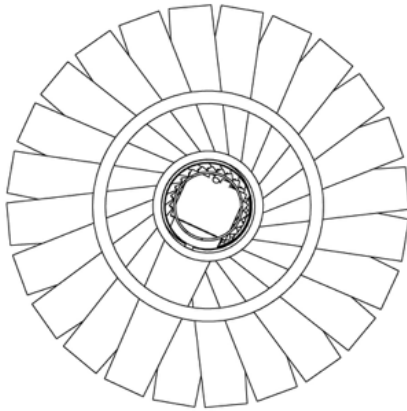

Shot Pattern

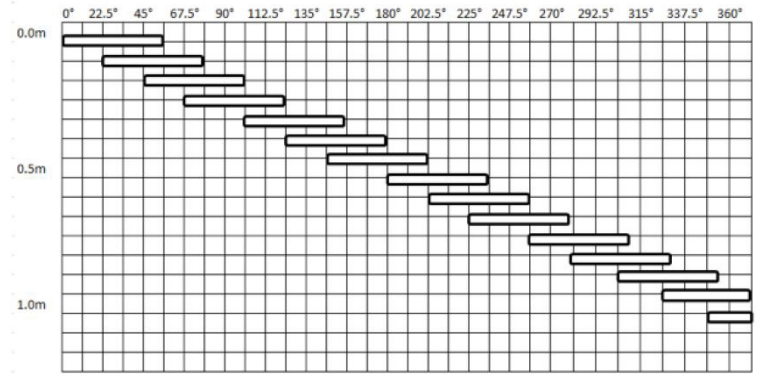

Technical Information

CARRIER SPECIFICATIONS		SHOT INTERVAL	GUN LENGTH	HELIX	SHOTS	GUN WEIGHT
Gun Type	Expendable, scalloped	1.14 m	1.47 m	1	16	56.6 kg
Pressure Rating	241 MPa	2.36 m	2.69 m	2	32	119.5 kg
Temperature Rating	Explosives and elastomer dependent	3.58 m	3.91 m	3	48	148.0 kg
Tensile Strength	2 000 kN	4.80 m	5.13 m	4	64	194.5 kg
Carrier Thread	4.125" - 6 TPI Acme					

- Note:
- 16 shots are required for 360° coverage
 - Indicated gun weights are without explosive components

Selection Chart

ITEM	1 HELIX	2 HELIX	3 HELIX	4 HELIX
125 mm DynaSlot XL Gun System	2329179	2330611	2330612	2330613
125 mm DynaSlot XL Charge Tube	2329181	2330064	2330062	2330066
125 mm DynaSlot XL Carrier	2329183	2330706	2330707	2330059
Retention Ring	7905825			
Booster Kit	2315319			


Note: To be used with 61 g DynaSlot XL and 61 g DynaSlot XL Puncher charges




DYNASLOT™ XL

5 IN 4 SPF 22.5° 61 G

Configuration Schematic

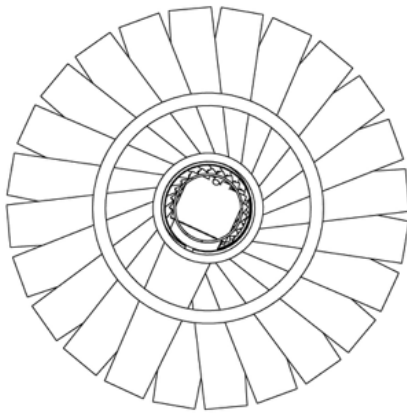

Shot Pattern

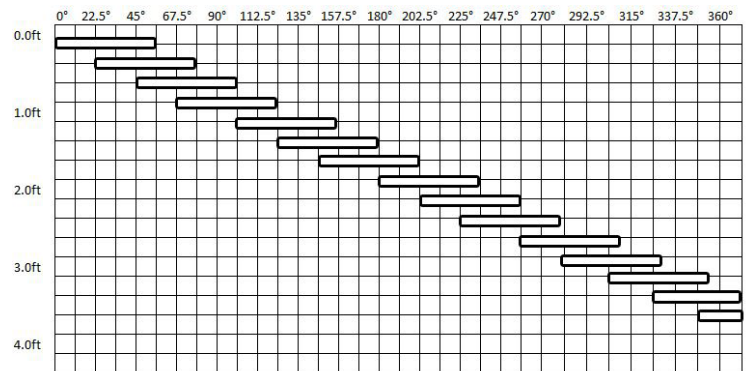

Technical Information

CARRIER SPECIFICATIONS		SHOT INTERVAL	GUN LENGTH	HELIX	SHOTS	GUN WEIGHT
Gun Type	Expendable, scalloped	44.9 in	57.9 in	1	16	124.8 lb
Pressure Rating	35 000 psi	92.9 in	105.9 in	2	32	263.5 lb
Temperature Rating	Explosives and elastomer dependent	140.9 in	153.9 in	3	48	326.3 lb
Tensile Strength	450 000 lbs	189.0 in	202.0 in	4	64	428.8 lb
Carrier Thread	4.125" - 6 TPI Acme					

- Note:
- 16 shots are required for 360° coverage
 - Indicated gun weights are without explosive components

Selection Chart

ITEM	1 HELIX	2 HELIX	3 HELIX	4 HELIX
5 in DynaSlot XL Gun System	2329179	2330611	2330612	2330613
5 in DynaSlot XL Charge Tube	2329181	2330064	2330062	2330066
5 in DynaSlot XL Carrier	2329183	2330706	2330707	2330059
Retention Ring	7905825			
Booster Kit	2315319			

Note: To be used with 61 g DynaSlot XL and 61 g DynaSlot XL Puncher charges